

# 42" High-Performance, Narrow Bezel Commercial LED Display

Durable and Reliable Design for 24/7 Use

**CDP4262-L**



The ViewSonic® CDP4262-L is a 42" high-performance, professional-grade commercial LED display with 700-nit brightness. Durable and reliable, this display solution can be operated 24 hours a day, 7 days a week, and is designed for environments where high brightness is required. Featuring a 15.8mm narrow-bezel design, Full HD 1080p resolution, SuperClear™ image enhancement technology with wide viewing angles, and dual built-in 10W stereo speakers, it delivers a superb multimedia messaging experience. Outputs include an integrated DVI port, and RS232 output with IR pass-through to support up to 5x5 daisy-chained displays for easy-to-manage video walls. Versatile connectivity options include HDMI, DisplayPort, DVI, D-Sub, YPbPr and CVBS inputs for flexible, one-time installation of a diverse range of high-definition devices. Delivering timely, customized messaging is easy with the content scheduling feature, making the CDP4262-L ideal for sharing public information in high-traffic transportation, hospitality, commercial, and education venues.

## **Narrow Bezel Optimized for Video Walls**

The ViewSonic CDP4262-L commercial display features a 15.8mm narrow bezel design. This sleek, narrow bezel maximizes impactful visual messaging for passersby, making the CDP4262-L the perfect choice for digital signage wall installations.

## **24/7 Continuous Operation, 50,000\*-Hour Lifespan**

Featuring a lifespan of up to 50,000 hours, the CDP4262-L commercial display is designed for reliable, continuous 24/7 use.

## **Full HD 1080p and 700 Nits Brightness**

The CDP4262-L displays content in Full HD 1920x1080 resolution with 700-nit high brightness to deliver superior pixel-by-pixel true-color performance. At this resolution and brightness, experience a more realistic viewing experience with crystal-clear, high-definition multimedia messaging.

## **Efficient, User-Friendly Content Scheduling & Settings**

The CDP4262-L provides an efficient, user-friendly scheduling interface via the on-screen display (OSD). Display setup features include time and date scheduling, repeat and shuffle settings, as well as content source settings for various inputs.

## **5x5 Daisy-Chain Support**

With integrated DVI output, the CDP4262-L supports up to a 5x5 daisy-chain setup for multi-display installations. In addition, 1080p signal transmission is supported in daisy-chain configurations.

## **RS232 In/Out with IR Pass-through for Easy Management**

RS232 input and output connectivity, along with IR pass-through functionality, provides for the easy and efficient management of multiple-display configurations from a single notebook or PC. By using the RS232 output, daisy-chained configurations can be managed via a primary CDP4262-L display.

# 42" High-Performance, Narrow Bezel Commercial LED Display

**CDP4262-L**



## Versatile Inputs and One-Time Configuration Settings


With a versatile selection of inputs, including HDMI, DVI, DisplayPort, CVBS, YPbPr (YCbCr) and VGA, the CDP4262-L enables you to easily connect and use a variety of digital equipment. Best of all, the one-time display installation and setup feature means your preferred source settings are never lost.

## Applications

- Transportation
- Retail
- Hotels
- Surveillance
- Education
- Video walls

## Optional Accessories

Stand .....STND-021  
Wall Mount Kit .....WMK-013

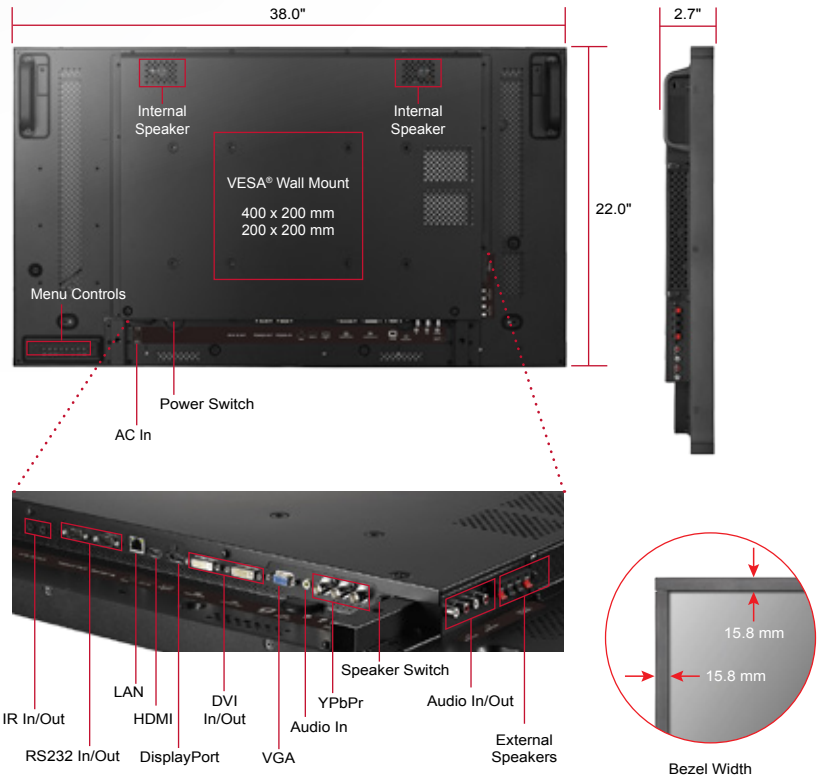

## Specifications

<b>LCD PANEL</b>	Type	42" color TFT LCD Module with LED Backlight
	Display Area	36.6" horizontal x 20.6" vertical; 42" diagonal
	Optimum Resolution	1920 x 1080
	Contrast Ratio	1300:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	12ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	700 cd/m2 (typ)
	Aspect Ratio	16:9
	Panel Surface	Hard coating (3H)
<b>INPUT</b>	Video Input	HDMI, DVI, DP, component (BNC), VGA
	Video Output	VGA, DVI-D
	Control Input/Output	RS232, RJ45
<b>AUDIO OUTPUT</b>	Speakers	Internal 10-watt (x2)
<b>INPUT SIGNAL</b>	TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p
<b>CONNECTOR</b>	Analog	15-pin mini D-sub (VGA), RCA Audio In
	Digital	HDMI, DVI-D, DisplayPort, YPbPr (BNC)
	Power	3-pin plug
<b>CONTROLS</b>	Panel	POWER, MUTE, INPUT, VOL +/-, UP, DOWN, MENU
	Picture	Brightness, Contrast, Sharpness, Black Level, Tint, Color, Color Temperature, Gamma Selection, Noise Reduction, Film Mode, Picture Reset
	Screen	Auto Setup, Auto Adjust, H Position, V Position, Clock, Clock Phase, Zoom Mode, Custom Zoom, Input Resolution, Screen Reset
	Sound	Balance, Treble, Bass, Audio Reset
	PIP	PIP Mode, PIP Size, PIP Audio, PIP H Position, PIP V Position, SUB input, PIP Reset
	Configuration 1	Off Timer, Schedule, Date and Time, Configuration 1 Reset
	Configuration 2	Language, OSD Turn Off, OSD H Position, OSD V Position, Information OSD, Monitor Information, Monitor ID, IR Control, Tiling, Power on Delay, Closed Caption, Configuration 2 Reset
	Configuration 3	Power Save, Heat Status, Screen Saver, Side Border Color, Configuration 3 Reset
	Advanced Option	Input Change, Terminal Setting, Scan Conversion, Color System, Scan Mode, Serial Control, LAN Setting, APM, Advanced Option Reset, Factory Reset

<b>POWER</b>	Voltage	AC 100–240V (universal), 50–60Hz
	Consumption	245W (typ)
<b>OPERATING CONDITIONS</b>	Temperature	32–104°F (0–40°C)
	Humidity	20–80% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical	38.0 x 22.0 x 2.7 in. / 965.8 x 558.8 x 69 mm
	Packaging	46.3 x 31.3 x 9.8 in. / 1178 x 795 x 250 mm
<b>BEZEL DIMENSIONS</b>	Left/Right	15.8 mm / 15.8mm
	Top/Bottom	15.8 mm / 15.8mm
<b>WEIGHT</b>	Net	40.3 lb. / 18.3 kg
	Gross	53.1 lb. / 24.1 kg
<b>WALL MOUNT</b>	VESA®	400 x 200 mm / 200 x 200 mm
<b>REGULATIONS</b>		CE, CB, WEEE, C-tick, FCC, ICES003, UL/cUL, CE, CB, CU, ENERGY STAR 6.0
<b>RECYCLE / DISPOSAL</b>		Please dispose of in accordance with local, state or federal laws
<b>WARRANTY</b>		Three-year limited warranty on parts, labor and backlight

## What's in the box?

CDP4262-L display, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

\*Lifespan may vary based on actual usage and other factors. Warranty exclusions may apply. Programs, specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2014 ViewSonic Corporation. All rights reserved. [16997-00B-12/13]