


Key Features

- 20-Point Multi-Touch
- Floating Pen - Annotation on Demand
- ViewBoard® Cast Content Sharing Software
- Built-in ARM Quad-core CPU with 16GB Storage
- Out-of-Box Collaboration



Product Description

Featuring 4K Ultra HD resolution and an immersive 20-point touch screen, the ViewSonic® ViewBoard® IFP7500 delivers incredible collaborative capabilities for 21st century boardrooms and classrooms. With astonishing 20-point simultaneous touch capabilities and pre-installed ViewSonic vBoard® annotation software, this 75" interactive flat panel lets multiple users write or draw on the screen with their fingers and styluses. With a built-in quad-core processor, as well as versatile connectivity options including multiple HDMI, VGA, RS232, RJ45, and USB ports, this display provides powerful computing for annotation and multimedia playback without the need for a PC. This display delivers optional slot-in PC capability, as well as future-proof Intel® SDM capability, for more computing-intensive interactive applications. The IFP7500 features a VESA-compatible design and can be placed on a wall mount, or on an optional trolley cart for flexible installation in classrooms and corporate meeting rooms.

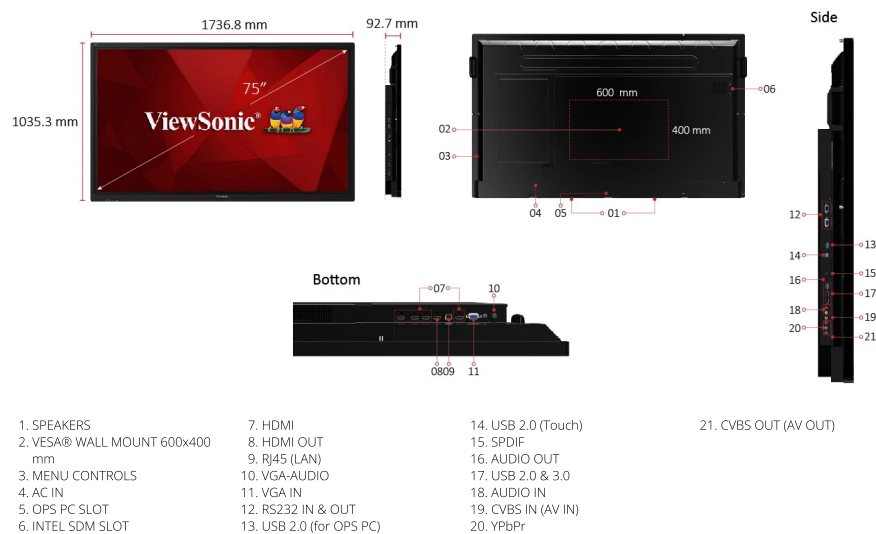

Visit Us www.viewsonic.com



LCD PANEL

Panel Size:	75"
Type/ Tech:	TFT LCD Module with DLED Backlight
Display Area (mm):	1649.66(H) x 927.94(V) (74.5" viewable)
Aspect Ratio:	16:9
Resolution:	3840 x 2160
Colors:	1.07B colors (10bit)
Brightness:	400 nits(typ.) 350nits(min.)
Contrast Ratio:	1200:1 (typ.)
Response Time:	8 ms
Viewing Angles:	H = 178, V = 178 (typ.)
Backlight:	DLED
Backlight Life:	30,000 Hours Min.
Hardness:	7H

TOUCH

Type/ Tech:	IR Recognition
Touch Resolution:	32767 x 32767
Touch Point:	20 points touch, 10 points writing
Response Time:	<10ms
System:	Windows 10 / Windows 8 / Windows 7 / Windows XP / Vista / Linux / Mac / Android / Wince / Chrome
Life Time:	60,000hrs

INPUT

HDMI:	x 4
RGB / VGA:	x 1
Audio:	x 1
CVBS (AV):	x 1
YPbPr:	x 1
RS232:	x 1
PC Slot:	x1 PC Slot (Intel OPS Standard) x1 SDM

OUTPUT

HDMI:	x 1 (for one of HDMI1/2/3)
Audio (Earphone out):	x 2 (front x1, side x1)
CVBS (AV):	x 1
SPDIF:	x 1
RS232:	x 1

LAN

RJ45:	x 1
-------	-----

USB

2.0 Type A:	x 3 (front x1, side x1, top x1)
3.0 Type A:	x 2
2.0 A type (Dedicated for OPS PC):	x 2 (front x1, side x1)
2.0 Type B (For Touch):	x 1

SPEAKERS

20W x 2

BUILT-IN PC

Processor:	ARM Cortex A53 Quad Core 1.5G Hz CPU
Graphic:	ARM Mali-450MP4
Memory:	2GB DDR3
Storage:	16GB eMMC
Networking:	10/100M auto-identification and DHCP

COMPATIBILITY

VGA:	Refer to timing table
HDMI:	480i, 480p,720p, 1080p, up to 2160p
CVBS:	480i

CONTROLS

Physical- Top OSD:	Input, Up, Down, Right(VOL+), Left(VOL-), Menu, Power
--------------------	---

POWER

Voltage:	100-240 VAC +/- 10% Wide Range, 50-60Hz +/-3 Hz
Consumption:	333.4 W

ERGONOMICS

Wall Mount (VESA®):	600 x 400mm; Screw: M8 x 20mm
----------------------	-------------------------------

OPERATING CONDITIONS

Temperature (° C):	32°F to 104°F (0°C to 40°C)
Humidity:	10% ~ 90% non-condensing

WEIGHT

Net (kg / lb):	60.64kg / 133.69lbs
Gross (kg / lb):	80.4kg / 177.25lbs

REGULATIONS

Standard:	cTUVus, FCC, MX-CoC, Mexico Energy, CE, CB, RoHS, ErP, REACH, WEEE, CCC, China Energy Label
-----------	---

WHAT'S IN THE BOX?

1.VGA cable(5 meters) 2.Power cable(3 meters) x 4 3.Remote control 4.USB cable(5 meters) 5.Audio cable(5 meters) 6.AV cable 7.Touching pen x 3 8.User manual CD wizard 9.Quick Start Guide 10.RS232 adapter 11.Clamp x 5 12.Plate 13.Screw x 2
--

