




Key Features

- Natural pen-on-paper writing experience with Ultra Fine Touch technology
- Seamless plug-and-present connectivity via USB-C
- Native whiteboarding software for seamless annotation and collaboration
- Wireless content sharing and 4-way split screen for multiple contributors
- myViewBoard Manager for simplified and centralized display management



Product Description

The ViewBoard® 50-4 is a sleek 98" 4K interactive display purpose-built for seamless presentation in corporate and educational spaces. Simply connect your laptop or tablet via a single USB-C cable for instant and effortless presentation functionality. Annotate and collaborate in real-time using integrated myViewBoard® digital whiteboarding software and enjoy a naturally smooth writing experience supported by Ultra Fine Touch technology and dual fine-tipped pens for digital accuracy. And to allow multiple contributors within a single presentation, ViewBoard® Cast offers single sign-on wireless content sharing with up to a 4-way split screen. Encased in a stylishly slim bezel, the ViewBoard® 50-4 not only elevates any room, but also empowers IT teams with myViewBoard® Manager, a web-based remote management system, for simplified and centralized display management from anywhere, anytime.

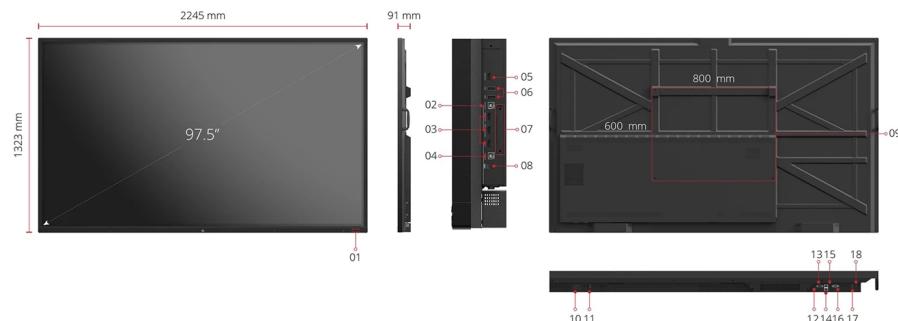

1. USB 2.0	8. USB Type-C	15. Audio In
2. Touch	9. VESA® Wall Mount(800x600mm)	16. VGA
3. HDMI In	10. Power In	17. USB 2.0
4. Touch	11. Power Switch	18. SPDIF
5. HDMI Out	12. Audio out	
6. USB 3.0	13. RS-232	
7. Wi-Fi Module Slot	14. LAN	

Visit Us

www.viewsonic.com

DISPLAY		COMPATIBILITY	
Panel Size:	98"	RGB PC/HDMI PC:	1920x1080
Panel Type:	TFT LCD Module with DLED Backlight	HDMI:	4K 60Hz/30Hz/1080p
Display Area (mm):	2171.85(H) x 1232.35(V) (97.52"diagonal)	EMBEDDED OS	Android 9
Aspect Ratio:	16:9	BUNDLE SOFTWARE	
Resolution:	UHD 3840x2160(Pixels)	Basic Annotation Software:	myViewBoard for android
Colors:	1.07B colors (10bit)	Pro Annotation Software:	myViewBoard for windows (Embedded in Windows Slot-in PC)
Brightness:	400 nits (typ.), 450 nits (max.)	Wireless Presentation:	Viewboard Cast
Contrast Ratio:	DCR: 3000:1	SPECIAL FEATURES	
Response Time:	8ms(TYP.)	All-in-one USB port:	Front "SmartPort USB" to all channels.
Viewing Angles:	H = 178, V = 178typ.	Simple LAN sharing between IPP and slot-in device:	Yes
Backlight Life:	30,000 Hours (Min)	Light Sensor:	Yes
Surface Treatment:	Anti-glare	POWER	
PLATFORM		Voltage:	100-240VAC +/- 10% Wide Range
Processor:	ARM Cortex A73*4	Consumption:	On mode: 192.5W, Off mode< 0.5W
RAM:	4GB DDR4	ERGONOMICS	
Storage:	32GB	Wall Mount (VESA®):	800*600
TOUCH		OPERATING CONDITIONS	
Type/ Tech:	Ultra fine touch technology	Temperature (° C):	0°C to 40°C
Touch Resolution:	32768 x32768	Humidity:	10% ~ 90% RH non-condensing
Touch Point:	20 points touch, 10 points writing	DIMENSIONS (W X H X D)	
INPUT		Physical (inch / mm):	88.4 x 52.1 x 3.6 in / 2245 x 1323 x 91 mm
HDMI:	HDMI 2.0 x3 (3840x2160 @60Hz)	Packaging (inch / mm):	95.9 x 58.8 x 13.6 in / 2435 x 1483 x 346 mm
RGB / VGA:	x 1	WEIGHT	
Audio:	x 1	Net (lb / kg):	228.4lb / 103.6kg
RS232:	x 1	Gross (lb / kg):	293.7lb / 133.2kg
OPS:	X1 PC Slot	REGULATIONS	
WiFi:	x 1 WiFi Slot	FCC, cTUVus, EPEAT, ES8, LBL, CE, CB, RCM	
OUTPUT		PACKAGE CONTENTS	
HDMI:	HDMI out 2.0 x1 (3840x2160 @60Hz)	1. Power cord 2. Remote control with AAA battery 3. USB cable for touch 4. Touch pen x 2 5. Quick Start Guide 6. RS232 adapter 7. Clamp x 5 8. Camera plate 9. Screw x 8 10. HDMI cable 11. USB Typc-C cable	
Audio:	3.5mm * 1	COMPATIBLE SLOT-IN PC	
SPDIF:	x1	VPC12-WPO series/VPC25-O series/VPC27-O series	
LAN			
RJ45:	x2		
USB			
Type A:	USB2.0 x 1USB3.0 x 4		
Type B:	x2, for touch		
Type C:	x1		
SPEAKERS			
16Wx2			
TOP CAMERA PLATE			
YES			