



## Key Features

- Impressively large, yet seamless view
- All-in-One design without complicated setup
- Easy delivery, installation, and maintenance
- Engaging front-facing presentation solution
- Flexible wireless content sharing solution

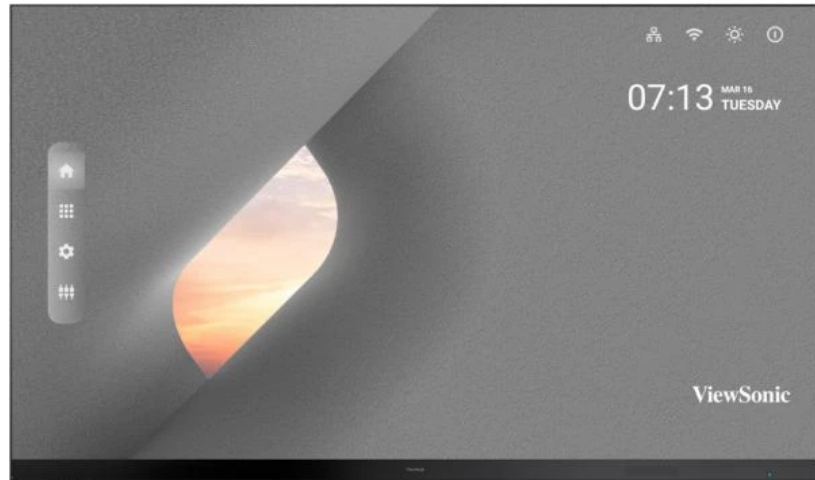

## Product Description

The ViewSonic® LDM216-251 is an innovative 216" All-in-One Direct View LED display that complements the design of high-end, enterprise conference rooms and lobbies. With a 120% Rec. 709 wide color gamut, millions of mounted tiny LEDs for direct image production, and an ultra-slim 35 mm thickness & bezel-free seamless design, the LDM216-251 offers greater color, brightness, and contrast performance, giving viewers a magnificent visual impact, whether hanging on the wall or aluminum alloy floor stand. The All-in-One large screen display boasts easy delivery, installation, and maintenance with a front-assembly modular design. The built-in screen-sharing software enables multiple meeting presenters to cast out content wirelessly, whether using laptops, phones, or tablets. Compatible with AV control systems, the ViewSonic® LDM216-251 enables IT personnel to remotely set up and configure.

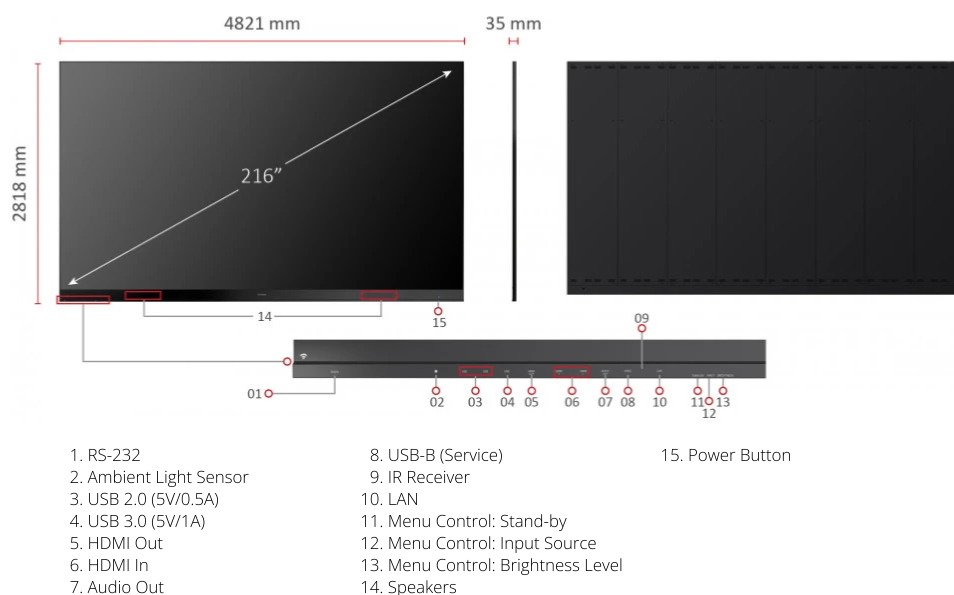

## SPECIFICATION

Screen Size:	216"
Display Area (mm):	4800 (H) x 2700(V)
Native Resolution:	1920x1080
Panel Technology:	Direct view LED
LED Package Type:	SMD 3 in 1
Bonding Wire:	Copper
Pixel Pitch (mm):	2.50
Refresh Rate:	3840Hz
Brightness (max.):	600 nits (8 levels adjustable)
Contrast Ratio (typ.):	6000:1
Orientation:	Landscape
Viewing Angles (typ.):	H = 160, V = 160
LED Lifetime (typ.):	100,000 Hours
Local Storage:	Total 32GB (26GB available storage)
Embedded OS:	Android 8.0
Resolution Support:	VGA(640 x 480) to 1080p(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Horizontal Frequency:	31K-94kHz
Vertical Scan Rate:	56-85Hz

## INPUT

HDMI:	x2 (HDMI 1.4, HDCP 1.4)
USB Type A:	x3 (USB3.0 x1, USB2.0 x2)
RJ45 Input (Internet):	x1
Wi-Fi Input:	2.4G/5G Hz

## OUTPUT

HDMI out:	x1 (HDMI 1.4, HDCP 1.4)
Speaker:	5Wx2
Audio out (3.5mm):	x1
USB Type A (Power):	Shared with USB input (5V/1A x1, 5V/0.5A x2)

## CONTROL

RJ45 (LAN control):	x1(shared with internet)
USB Type A (Services):	x1(shared with USB A input)
USB Type B (Debug):	x1
RS232 (DB 9-pin female):	x1
IR Receiver:	x1

## OTHERS

Power Supply Voltage:	100-120V/30A~50/60Hz 220-240V/15A~ 50Hz (vary by country)
Power Consumption:	3430W (typ), 4900W (max) < 0.5W (Sleep), < 0W (Off)
Operating Temperature:	0~40°C
LED Module Quantity:	128
Ingress Protection Rating:	IP30
Net Weight:	750 lbs (340kg)
Gross Weight:	992 lbs (450kg)
Screen Dimensions (WxHxD):	189.8x110.9x1.4 inches (4820.95x2818.45x35mm)
Screen Dimensions (WxHxD) with wall mount:	189.8x110.9x2.2 inches (4820.95x2818.45x56mm)
Packing Dimensions (WxHxD):	109.4x33.5x40.2 inches (2780x850x1020mm)

## STANDARD ACCESSORIES

Power Cord:	x2
USB Cable (A-B):	x1
Remote Control:	x1
QSG:	x1
Wall Mount:	x1
Spare Parts:	LED PCB Unit x2
Maintenance Tool:	LD-MK-001 x1

## OPTIONAL ACCESSORIES

Maintenance Tool:	LD-MK-001
ViewBoard Cast Button(USB-C):	VB-WPS-001
ViewBoard Cast Button(USB-A+HDMI):	VB-WPS-003

