
Key **Features**

- Impressively large, bezelfree visual experiences
- · All-in-One design without complicated setup
- · Real-to-life colors and high brightness
- Immersive audio from built-in Harman Kardon speakers
- · Adaptable and flexible to suit any display scenario



Product **Description**

Gaze upon astoundingly lifelike imagery on the minimalistic 2nd Gen 135" ViewSonic® LDP135-151 All-in-One Direct View LED display. The All-in-One modular design offers an effortless installation and maintenance process. This next-generation display is upgraded with advanced features to deliver a spectacular audiovisual experience and user-forward design. Delivering 120% Rec. 709 wide color gamut, lightning-fast 4,440Hz refresh rate, and a peak brightness of 600 nits, every video, presentation, or lecture will be an immersion of real-to-life color and extraordinary detail. The display is also equipped with Harman Kardon speakers, 4K/HDR/HLG support and Frame Interpolation technology for unsurpassable, immersive content delivery. At 25mm slim and lined with a 5mm frameless edge, the sleek display exudes sophistication and elegance in any modern setting. It offers flexibility and adaptability in design - with portrait and landscape installations to complement any space and scenario. The screens can be easily fused together to form an ultra-wide 32:9 video wall to deliver a seamless visual experience in epic proportions. The system control box can also be easily detached to blend into every design.

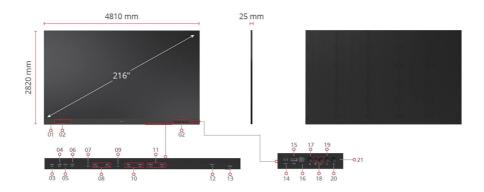

- 1. Power Switch
- 2. Harman Kardon Speakers
- 3. HDMI Out
- 4. Audio Out
- 8. USB 2.0 (5V/1.5A) x 2
- 9. LAN & Control
- 10. HDML 2.0 x 2
- 11. HDMI 1.4 x 2
- 15. USB 2.0 (5V/1.5A)
- 16. IR Receiver
- 17. Menu Control: Brightness Level
- 18. Menu Control: Volume

5. Audio In 6. S/PDIF Out 7. IR In 12. HDMI 2.1 13. RS232 14. USB-C (5V/2A) 19. Menu Control: Input Source 20. Power Button 21. Indicator Light

Visit Us

www.viewsonic.com

SPECIFICATION		OTHERS	
Screen Size: Display Area (mm):	216" 4800 (H) x 2700(V)	Power Supply Voltage:	100-120V/30A~ 50/60Hz or 220- 240V/15A~ 50Hz(vary by country)
Native Resolution: Panel Technology:	1920x1080 Direct view LED	Power Consumption:	3430W (typ), 4900W (max)< 0.5W (Sleep), < 0W (Off)
LED Package Type:	SMD 3 in 1	Operating Temperature:	0~40°C
Bonding Wire:	Gold	LED Module Quantity:	128
Pixel Pitch (mm):	2.50	Ingress Protection Rating:	IP30
Refresh Rate:	4440Hz	Net Weight:	640 lbs(290 kg)
Brightness (max.):	600 nits (8 levels adjustable)	Gross Weight:	883 lbs(400 kg)
Contrast Ratio (typ.):	6000:1		189.4x111x1
Orientation:	Landscape / Portrait	Screen Dimensions (WxHxD):	inches(4810 x 2820 x 25 mm)
Viewing Angles (typ.):	H = 160, V = 160	Screen Dimensions (WxHxD) with wall mount:	189.4x111x2.2 inches(4810 x 2820 x 57 mm)
LED Lifetime (typ.):	100,000 Hours		
Local Storage:	Total 64GB (56GB available storage)	Packing Dimensions:	109.4x27.95x37 inches(2780 x 710 x
Embedded OS:	Android 9.0	STANDARD ASSESSORIES	940 mm)
Resolution Support:	VGA(640 x 480) to 1080p(1920 x 1080)	STANDARD ACCESSORIES Power Cord:	x2
HDTV Compatibility:	480i, 480p, 576i, 576p,	LAN Cable (Cat 5A):	x1 (5m)
	720p, 1080i, 1080p, 2160P/60Hz	IR Extender Cable:	x1(3m)
Horizontal Frequency:	23-120 kHz	Remote Control:	x1
Vertical Scan Rate:	15-135 Hz	QSG:	x1
INPUT		Wall Mount:	x1
HDMI:	x6(HDMI 2.1 x 1, HDMI	Spare Parts:	LED PCB Unit x7
	2.0 x 2, HDMI 1.4 x 2, HDMI 2.0 internal x1)	Maintenance Tool:	LD-MK-001 x1
USB Type A:	x3(USB2.0 x3)	OPTIONAL ACCESSORIES	
RJ45 Input (Internet):	x1	Maintenance Tool:	LD-MK-001
IR in:	x1	ViewBoard Cast Button(USB-C):	VB-WPS-001
Wi-Fi Input:	2.4G/5G Hz	ViewBoard Cast Button(USB-A+HDMI):	VB-WPS-003
USB Type C:	x1(Video input、 Power output (5V/2A))	,	
Audio-in (3.5mm):	x1		
HDBaseT:	x1(1080P@100m、 4K30Hz@70m)		
OUTPUT			
HDMI out:	x2(HDMI 2.0 external x1,internal x1)		
Speaker:	20W x2 (harman kardon)		
Audio out (3.5mm):	x 1		

Copyright © ViewSonic Corporation 2000-2023. All rights reserved.

Shared with USB input(5V/1.5A x3)

x1(shared with

x1(shared with USB A

internet)

input)

x1

x1

USB Type A (Power):

RJ45 (LAN control):

USB Type A (Services):

RS232 (DB 9-pin female):

CONTROL

IR Receiver: