


## Key Features

- Pre-assembled kit ready for instant use
- Foldable screen with the movable flight case for easy delivery
- Built-in stand with motorised height adjustment
- Impressive audio from Harman Kardon speakers
- Seamless large display for rental at any event/exhibition



## Product Description

The ViewSonic® LDS135-151 is a 135" All-in-One Direct View LED Display Solution Kit that boasts instant use, easy delivery, and convenient maintenance, making it an ideal rental-ready solution for events, exhibitions, or any other short-term usage. The pre-assembled design and built-in motorized height adjustment stand enables effortless set up within just a few minutes. Delivery convenience is greatly enhanced with the new foldable screen design, reducing the packaging size of the movable flight case by nearly 50% compared to the previous generation, thus minimizing shipping costs. With the seamless large screen and superior built-in Harman Kardon speakers, be ready to impress your audience everywhere from high-end board rooms and receptions to galleries, auditoriums, and other large venues.

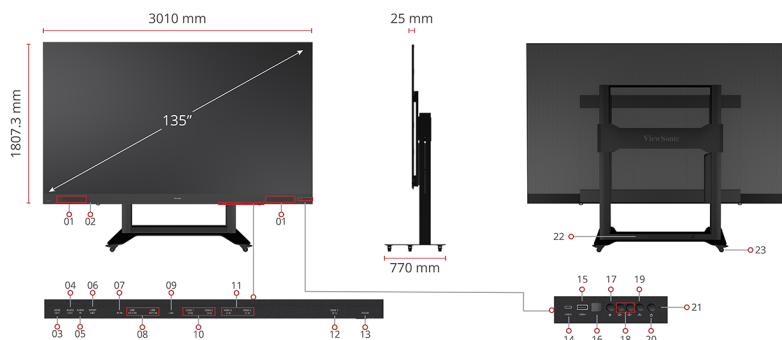

1. Harman Kardon Speakers
2. Power Button
3. HDMI Out
4. Audio Out
5. Audio In
6. S/PDIF Out
7. IR In

8. USB 2.0 (5V/1.5A) x 2
9. LAN & Control
10. HDMI 2.0 x 2
11. HDMI 1.4 x 2
12. HDMI 2.1
13. RS232
14. USB-C (5V/2A)

15. USB 2.0 (5V/1.5A)
16. IR Receiver
17. Menu Control: Brightness Level
18. Menu Control: Volume
19. Menu Control: Input Source
20. Power Button
21. Indicator Light

22. Control Panel: Height Adjustment
23. 360° Silent Wheels

## SPECIFICATION

|                        |  |
|------------------------|--|
| Screen Size:           | 135"   |
| Display Area (mm):     | 3000 (H) x 1687.5V)                                    |
| Native Resolution:     | 1920x1080  |
| Panel Technology:      | Direct view LED  |
| LED Package Type:      | SMD 3 in 1   |
| Bonding Wire:          | Gold   |
| Pixel Pitch (mm):      | 1.56   |
| Refresh Rate:          | 4440Hz   |
| Brightness (max.):     | 600 nits (8 levels adjustable)                         |
| Contrast Ratio (typ.): | 6000:1   |
| Orientation:           | Landscape  |
| Viewing Angles (typ.): | H = 160, V = 160                                       |
| LED Lifetime (typ.):   | 100,000 Hours  |
| Local Storage:         | Total 64GB<br>(56GB available storage)                 |
| Embedded OS:           | Android 9.0  |
| Resolution Support:    | VGA(640 x 480) to 1080p(1920 x 1080)                   |
| HDTV Compatibility:    | 480i, 480p, 576i, 576p, 720p, 1080i, 1080p, 2160P/60Hz |
| Horizontal Frequency:  | 23-120 kHz   |
| Vertical Scan Rate:    | 15-135 Hz  |

## INPUT

|                        |  |
|------------------------|--|
| HDMI:                  | x6<br>(HDMI 2.1 x 1, HDMI 2.0 x 2, HDMI 1.4 x 2, HDMI 2.0 internal x1) |
| USB Type A:            | x3<br>( USB2.0 x3)   |
| RJ45 Input (Internet): | x1   |
| IR in:                 | x1   |
| Wi-Fi Input:           | 2.4G/5G Hz   |
| USB Type C:            | x1<br>(Video input, Power output (5V/2A))                              |
| Audio-in (3.5mm):      | x1   |

## OUTPUT

|                     |  |
|---------------------|--|
| HDMI out:           | x2<br>(HDMI 2.0 external x1,internal x1) |
| Speaker:            | 20W x2 (Harman Kardon)                   |
| Audio out (3.5mm):  | x1                                       |
| USB Type A (Power): | Shared with USB input (5V/1A x3)         |

## CONTROL

|                          |                             |
|--------------------------|-----------------------------|
| RJ45 (LAN control):      | x1(shared with internet)    |
| USB Type A (Services):   | x1(shared with USB A input) |
| RS232 (DB 9-pin female): | x1                          |
| IR Receiver:             | x1                          |

## OTHERS

|                            |  |
|----------------------------|--|
| Power Supply Voltage:      | 100-120V/30A~50/60Hz or 220-240V/15A~ 50Hz (vary by country) |
| Power Consumption:         | 1200W (typ), 2300W (max)<br>< 0.5W (Sleep), < 0W (Off)       |
| Operating Temperature:     | 0~40°C   |
| LED Module Quantity:       | 100  |
| Ingress Protection Rating: | IP30   |
| Net Weight:                | 496 lbs<br>(225 kg)  |
| Gross Weight:              | 728 lbs<br>(330 kg)  |
| Screen Dimensions (WxHxD): | 1800x1948x770 mm(min.)<br>3010x2598x770 mm(max.)             |
| Packing Dimensions:        | 74.8x80x31.5 inches<br>(1900x2032x800 mm)                    |

## STANDARD ACCESSORIES

|                     |                 |
|---------------------|-----------------|
| Power Cord:         | x1              |
| LAN Cable (Cat 5A): | x1 (5m)         |
| IR Extender Cable:  | x1(3m)          |
| Remote Control:     | x1              |
| QSG:                | x1              |
| Spare Parts:        | LED PCB Unit x7 |
| Maintenance Tool:   | LD-MK-001 x1    |

## OPTIONAL ACCESSORIES

|                                    |            |
|------------------------------------|------------|
| Maintenance Tool:                  | LD-MK-001  |
| ViewBoard Cast Button(USB-C):      | VB-WPS-001 |
| ViewBoard Cast Button(USB-A+HDMI): | VB-WPS-003 |