


## Key Features

- Foldable design fits through elevators, doorways and tight spaces for easy deployment
- Pre-assembled, tool-free setup enables instant start with no installation required
- Built-in control box and industry-leading height motorized stand ensure clear sightlines
- GOB surface protection and flight case safeguard the display during use and transport
- Single remote control adjusts display settings and stand height for simplified operation



## Product Description

The ViewSonic® LDS136-152 is a 4th-generation mobile All-in-One direct view LED display designed for rapid deployment, easy transport, and simplified operation. With a pre-assembled design and an integrated control box with motorized stand, setup takes just 10 minutes with no wall mounting required. Its foldable screen significantly reduces packaging size, improving shipping efficiency and enabling easy transport through tight spaces and between locations. The motorized stand extends up to an industry-leading 3.76 ft (1148 cm), ensuring clear sightlines across audiences. Integrated control and rear I/O within the motorized stand enable tidy cable management and a clean, frameless appearance. A single remote controls stand height and display settings, simplifying operation. Featuring GOB surface treatment with IP65 and IK06 ratings, the display resists dust, moisture, and impact during use. With its seamless 136-inch display and dual 30W speakers, the LDS136-152 is ideal for high-end boardrooms, receptions, galleries, auditoriums, and other large venues.

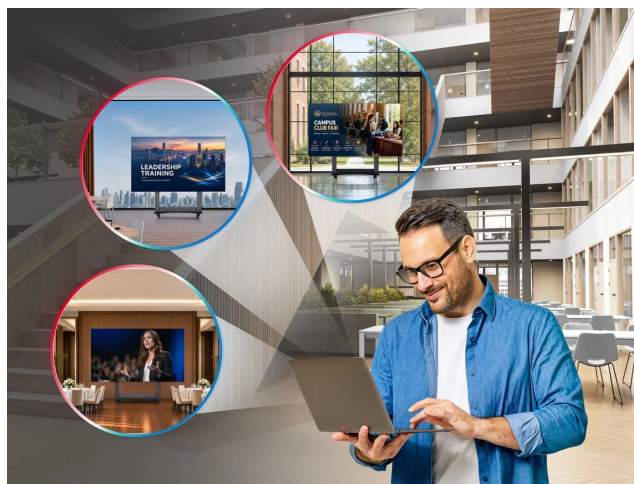

- |               |                     |
|---------------|---------------------|
| 1. Power Key  | 8. LAN              |
| 2. HDMI In x3 | 9. Service          |
| 3. HDMI Out   | 10. RS232           |
| 4. USB-C      | 11. Slot In OPS     |
| 5. USB x3     | 12. Power Switch    |
| 6. Audio Out  | 13. AC In           |
| 7. S/PDIF     | 14. Slot In Mini PC |

## SPECIFICATION

|                        |                                        |
|------------------------|----------------------------------------|
| Screen Size:           | 136"                                   |
| Display Area (mm):     | 3000 (H) x 1687.5(V)                   |
| Native Resolution:     | 1920x1080                              |
| Panel Technology:      | Direct view LED                        |
| LED Package Type:      | SMD 3 in 1 (GOB)                       |
| Bonding Wire:          | Copper                                 |
| Pixel Pitch (mm):      | 1.56                                   |
| Brightness (max.):     | 600 nits (100 levels adjustable)       |
| Contrast Ratio (typ.): | 6500:1                                 |
| Color Temperature:     | 3000K -10000K                          |
| Orientation:           | Landscape                              |
| Viewing Angles (typ.): | H = 170, V = 170                       |
| LED Lifetime (typ.):   | 100,000 Hours                          |
| Local Storage:         | Total 64GB<br>(36GB available storage) |
| Embedded OS:           | Android 13                             |
| Resolution Support:    | VGA(640 x 480) to 4K(3840 x 2160@60hz) |
| HDTV Compatibility:    | 480p, 576p, 720p, 1080p, 2160p         |
| Horizontal Frequency:  | 31K-94kHz                              |
| Vertical Scan Rate:    | 56-84Hz                                |

## INPUT

|                   |                                                        |
|-------------------|--------------------------------------------------------|
| HDMI:             | 4<br>(HDMI 2.0/HDCP 2.2)<br>(internal x1, external x3) |
| USB Type A:       | 3                                                      |
| RJ45 Input:       | 3<br>(internet/control x1, service x1,<br>reserve x1)  |
| IR in (3.5mm):    | 1                                                      |
| Wi-Fi Input:      | 2.4G/5G Hz                                             |
| USB Type C:       | 1<br>(data only)                                       |
| OPS slot (80Pin): | 1                                                      |

## OUTPUT

|                     |                                                                          |
|---------------------|--------------------------------------------------------------------------|
| HDMI out:           | 1<br>(HDMI 2.0/HDCP 2.2)                                                 |
| Speaker:            | 30Wx2                                                                    |
| Audio out (3.5mm):  | 1                                                                        |
| S/PDIF:             | 1                                                                        |
| USB Type A (Power): | USB 5V/1.5A x1;<br>USB 5V/1A x2, 5V/0.5A x1<br>(shared with USB A input) |
| USB Type C (Power): | Shared with USB Type C input<br>(5V/1A x1)                               |

## CONTROL

|                          |                            |
|--------------------------|----------------------------|
| RJ45 (LAN control):      | 1                          |
| USB Type A (Services):   | 1(shared with USB A input) |
| USB Type B:              | 1(reserve)                 |
| RS232 (DB 9-pin female): | 1                          |
| IR Receiver:             | 1                          |
| Light Sensor:            | 1                          |

## OTHERS

|                                            |                                                                                                                                    |
|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Power Supply Voltage:                      | 100-240V ~ 50/60Hz<br>(vary by country)                                                                                            |
| Power Consumption (W/unit):                | 609W (typ), 1827W (max)<br>< 0.5W (Hibernate)<br>Inrush Current:TBD                                                                |
| Heat Dissipation (BTU/hr):                 | 2077.9 (typ), 6234 (max)                                                                                                           |
| Heat Dissipation per Unit Area (BTU/h/m²): | 410.4 (typ), 1231.4 (max)                                                                                                          |
| Operating Temperature:                     | 0~40°C                                                                                                                             |
| Total LED Module Quantity:                 | 100                                                                                                                                |
| Ingress Protection Rating:                 | IP65(Front)                                                                                                                        |
| Impact Protection Rating:                  | IK06(Front)                                                                                                                        |
| Net Weight:                                | 594.15 lbs<br>(269.5 kg)                                                                                                           |
| Gross Weight:                              | 963.42 lbs<br>(437 kg)                                                                                                             |
| Product Dimensions (WxHxD):                | 71.68x76.68x30.71 inches (min.)<br>(1821x1948x780 mm (min.))<br>118.58x112.13x 30.71 inches<br>(max.)<br>(3012x2848x780 mm (max.)) |
| Packing Dimensions (WxHxD):                | 77.6x78.29x34.37 inches<br>(1971x1989x873 mm)                                                                                      |

## STANDARD ACCESSORIES

|                     |                                      |
|---------------------|--------------------------------------|
| Power Cord:         | 1                                    |
| LAN Cable (Cat 5E): | 1                                    |
| IR Extender Cable:  | 1                                    |
| Remote Control:     | 1(Bluetooth & IR)                    |
| QSG:                | 1                                    |
| Spare Parts:        | LED module x7<br>3 in 1 hub board x3 |
| Maintenance Tool:   | LD-MK-006 x1                         |

## OPTIONAL ACCESSORIES

|                   |           |
|-------------------|-----------|
| Maintenance Tool: | LD-MK-006 |
|-------------------|-----------|