

TOSHIBA



Bright performance

- Lens shift-function
- Extreme bright with 4,500 ANSI-lumens
- Powered zoom
- Ideal for installation
- Optional lenses

x4500




LCD stands for Liquid Cristal Displays



x4500

These projectors are opportune for all conferences.

- Display** 3 x 1.0" Polysilicon TFT (MLA)
- Resolution** XGA 1,024 x 768
- Brightness** 4,500 ANSI-lumens
- Colour reproduction** 16.7 mio. colours
- Contrast** 750:1
- Projection format** 4:3 switchable to 16:9
- Lamp** 310 W (TLPLX45LAMP)
- Max. lamp life** up to max. 2,000 hours
- Lens** F = 1.7 - 2.4/f = 31 - 46 mm
- Zoom** 1.5 x
- Frequency (hor./vert.)** 15 - 91 kHz/50 - 120 Hz
- Projection** front, rear and ceiling
- Digital keystone correction** vertical & horizontal +/- 10°
- Picture size (diagonal)** 1.0 m - 12.7 m
- Projection distance** 1.2 m - 23.2 m
- Input signals** NTSC/PAL/SECAM, VGA, SVGA, XGA, SXGA & UXGA (compr.)
- Inputs** DVI-D via MI-D, RGB (D-sub), composite video, S-video, 2 x component video (5 x BNC, 3 x cinch), 3 x audio (2 x stereo mini jack, 2 x cinch)
- Outputs** monitor (D-sub), audio (stereo mini jack)
- Serial interface** RS-232C, USB, LAN (RJ45), DC out
- Power supply** AC 100 - 120V, 220 - 240 V
- Loudspeaker** integrated
- Dimensions (W x H x D)** 420 x 320 x 150 mm
- Weight** 7.7 kg
- Operation noise** normal 34 dB / ECO mode 29 dB
- Specials** powered zoom, motor-lens shift, motor-focus, optional lenses
- Accessories** remote control with batteries, owners manual, RGB-, RCA-, audio- and power cable, M1D_USB mouse, lens cap, mouse remote controller set
- Options** ceiling mount, spare lamp, camera c001

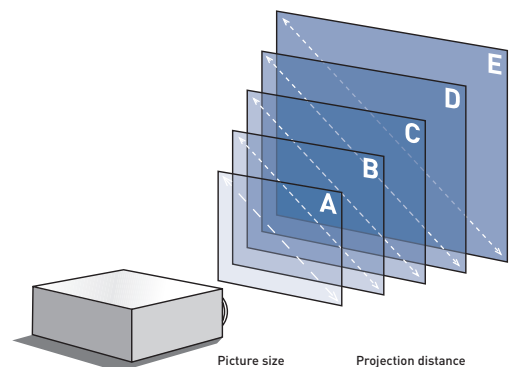

Picture size	Projection distance
A 1.0 m	1.2-1.8 m
B 2.5 m	3.0-4.6 m
C 3.8 m	4.6-6.9 m
D 6.4 m	7.7-11.6 m
E 12.7 m	15.5-23.2 m