


1001

-

100

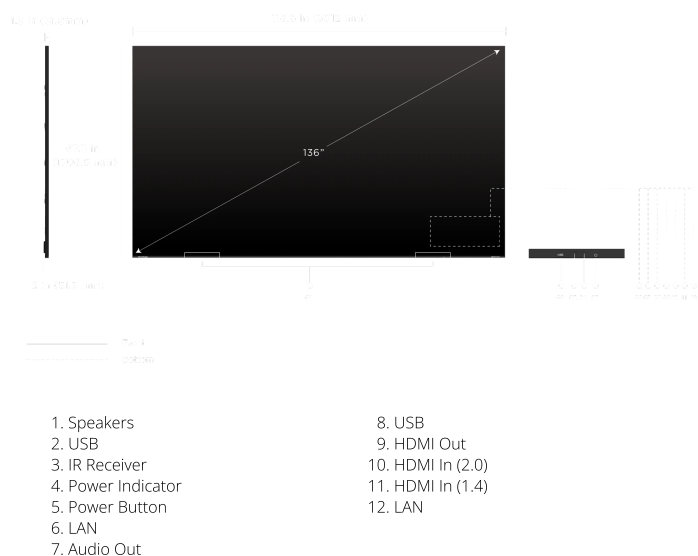

SPECIFICATION

Screen Size:	136"
Display Area (mm):	3000 (H) x 1687.5 (V)
Native Resolution:	1920x1080
Panel Technology:	Direct view LED
LED Package Type:	SMD 3 in 1 (GOB)
Bonding Wire:	Copper
Pixel Pitch (mm):	1.56
Brightness (max.):	600 nits (100 levels adjustable)
Contrast Ratio (typ.):	6500:1
Color Temperature:	3000K-10000K
Orientation:	Landscape
Viewing Angles (typ.):	H = 170, V = 170
LED Lifetime (typ.):	100,000 Hours
Embedded OS:	Simplified OS
Resolution Support:	VGA(640 x 480) to 4K(3840 x 2160@60hz)
HDTV Compatibility:	480p, 576p, 720p, 1080p, 2160p
Horizontal Frequency:	31K-94kHz
Vertical Scan Rate:	56-84Hz

INPUT

HDMI:	2 (HDMI 2.0/HDCP 2.2 x1, HDMI1.4/HDCP1.4 x1) (internal x2)
USB Type A:	2 (internal x1, external x1)
RJ45 Input:	1 (control)

OUTPUT

HDMI out:	1 (HDMI 1.4/HDCP 1.4, internal)
Speaker:	15Wx2
Audio out (3.5mm):	1
USB Type A (Power):	Shared with USB A input (5V/0.9A)

CONTROL

RJ45 (LAN control):	1
USB Type A (Services):	1(shared with USB A input)
RS232 (DB 9-pin female):	1
IR Receiver:	1

OTHERS

Power Supply Voltage:	100-240V ~ 50/60Hz (vary by country)
Power Consumption (W/unit):	534W (typ), 1600W (max) < 0.5W (Hibernate)
Heat Dissipation (BTU/hr):	1822 (typ), 5459.2 (max)
Heat Dissipation per Unit Area (BTU/h/m²):	355.7 (typ), 1078.9 (max)
Operating Temperature:	0~40°C
Total LED Module Quantity:	100
Ingress Protection Rating:	IP65(Front)
Impact Protection Rating:	IK06(Front)
Net Weight:	230.05 lbs (104.4 kg)
Gross Weight:	513.68 lbs (233 kg)
Product Dimensions (WxHxD):	118.58 x 67.26 x 2.04 inches (3012 x 1708.5 x 51.7 mm)
Product Dimensions (WxHxD) with wall mount:	118.58 x 67.26 x 2.47 inches (3012 x 1708.5 x 62.7 mm)
Packing Dimensions (WxHxD):	77.95 x 42.32 x 39.37 inches (1980x1075x1000 mm)

STANDARD ACCESSORIES

Power Cord:	1
HDMI Cable:	1 (USB Type C to HDMI)
LAN Cable (Cat 5E):	1
Remote Control:	1(IR)
QSG:	1
Wall Mount:	1
Spare Parts:	LED module x7 3 in 1 hub board x1
Maintenance Tool:	LD-MK-006 x1

OPTIONAL ACCESSORIES

Maintenance Tool:	LD-MK-006
Floor Stand:	LD-STND-009